



RTCM

State Space Representation (SSR)

Overall Concepts Towards

PPP-RTK

Gerhard Wübbena

Geo++[®] GmbH
30827 Garbsen Germany
www.geopp.de

Contents



- Terms and Abbreviations
- RTCM-SSR Working Group
- GNSS Error Sources
- Carrier Phase Ambiguity Resolution
- OSR and SSR approaches
- RTCM SSR development requirements, strategy and rules
- Standardization issues, consistency
- OSR vs SSR



Terms and Abbreviations

Terms and Abbreviations



- **RTCM** – **R**adio **T**echnical **C**ommission for **M**aritime **S**ervices
- **SSR** – “**S**tate **S**pace **R**epresentation”
 - error components affecting positioning application are represented as parameters of state vector
- **OSR** – “**O**bservation **S**pace **R**epresentation”
 - “lump sum” of error components are represented in observation space
- **RT** - “**R**eal **T**ime” vs
- **PP** - “**P**ost **P**rocessing”
- **PPP** – “**P**recise **P**oint **P**ositioning” – Using **SSR** parameters to determine precise position of **single points** – In use since many years for post-processing applications utilizing IGS state parameters (orbits, clocks) PP-PPP
- **RTK** – “**R**eal **T**ime **K**inematic” – Carrier phase based positioning yielding centimeter accuracy with very short observation time on rovers through carrier phase *ambiguity resolution* (AR): “**Centimeters in Seconds**”. In use since approx. 20 years utilizing OSR from single reference stations and networks (Network – RTK)
- **PPP-RTK** – achieve RTK performance for single points using SSR

Terms and Abbreviations



- **AR** – “**Ambiguity Resolution**”
- **DF** – **Dual Frequency**
- **SF** – **Single Frequency**
- **VTEC/STEC** – Ionospheric **V**ertical/**S**lant **T**otal **E**lectron **C**ontent
- **TTFA** – **T**ime **T**o **F**ix **A**mbiguities
- **WL** – **W**ide **L**ane
- **NL** – **N**arrow **L**ane
- **MW** – **M**elbourne-**W**übbena WL-AR method




- **Primary goal:**
 - Development of messages to exchange information about **GNSS error states (SSR)** for **precise positioning** applications **including RTK**
 -
- Working Group established in 2007
 - ~15 members
- 3 Stage Development Plan
 1. **Satellite Orbits, Clocks, Satellite Code Biases**
 - **Code Based DF-RT-PPP**
 2. **Vertical Ionosphere (VTEC), Satellite Phase Biases**
 - **Code Based SF-RT-PPP, Carrier based DF-RT-PPP with AR**
 3. **Slant Ionosphere (STECC) and Troposphere**
 - **RTK**



GNSS Error Sources

Major GNSS Error Sources / RTCM State Parameters

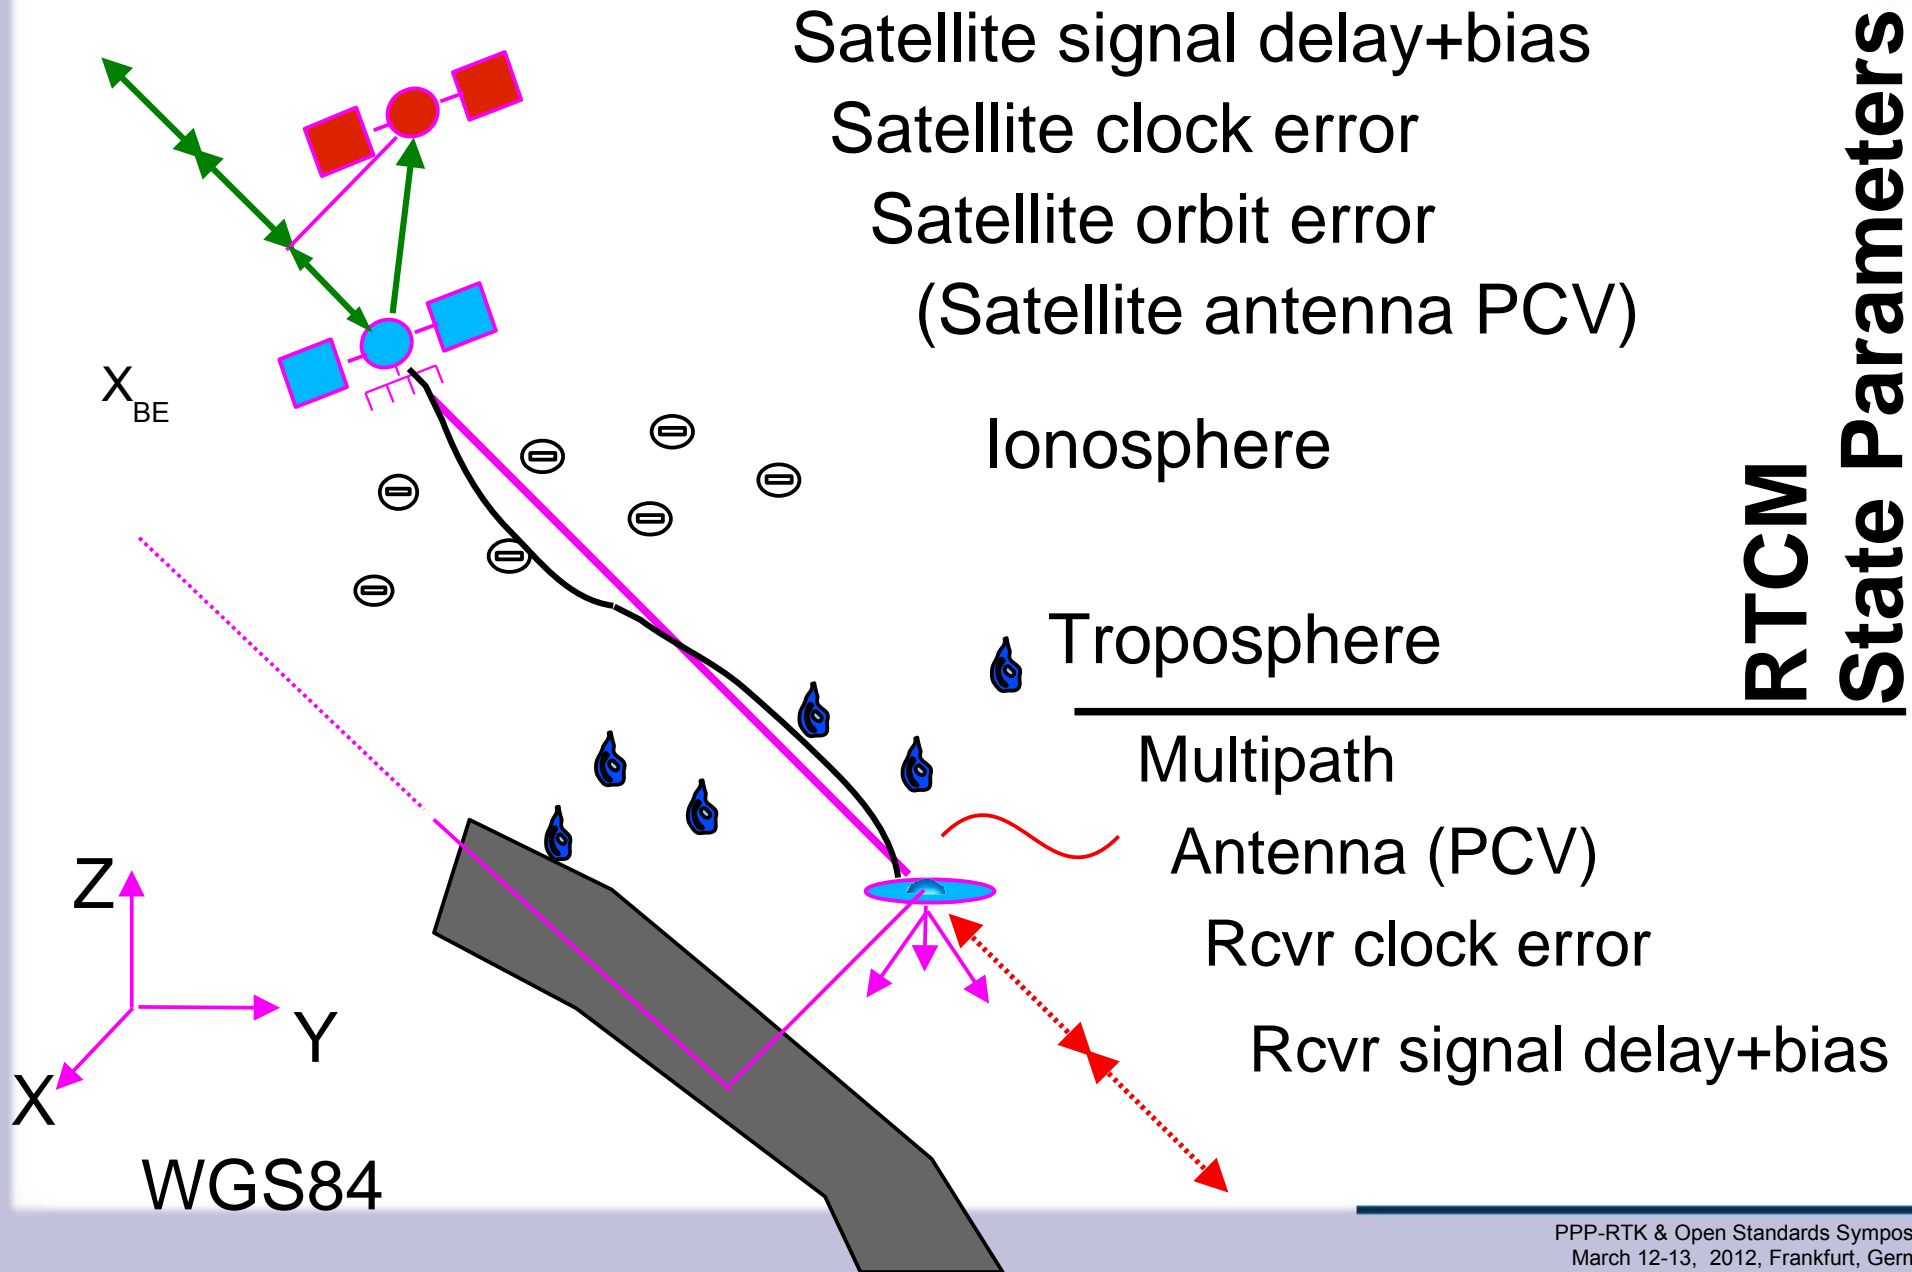



Carrier Phase Ambiguity Resolution

Ambiguity Resolution




- **RTK** (“Centimeters in Seconds”) **requires resolution of carrier phase ambiguities**
- Different techniques have been developed in the past
 - **GFAR** – **Geometry Free AR**
 - Linear combinations of different code and carrier signals are used to determine ambiguities
 - Often used: **Melbourne-Wübbena - MW**
 - Combines carrier wide lane and code “narrow lane” to resolve wide lane ambiguity
 - **GBAR** – **Geometry Based AR**
 - Utilizes redundant satellites to find the optimal integer ambiguity vector
 - Often used: **Lambda** method (Teunissen (1993) Technical University of Delft)
 - **Combinations of GFAR and GBAR**

First Order Ionospheric Effect on Signal Components



- Signal components received at the same time have different „apparent“ transmission times
 - biases, higher order ionospheric and multipath effects ignored:

Apparent GPS Signal transmission Times (First order Iono Effect):

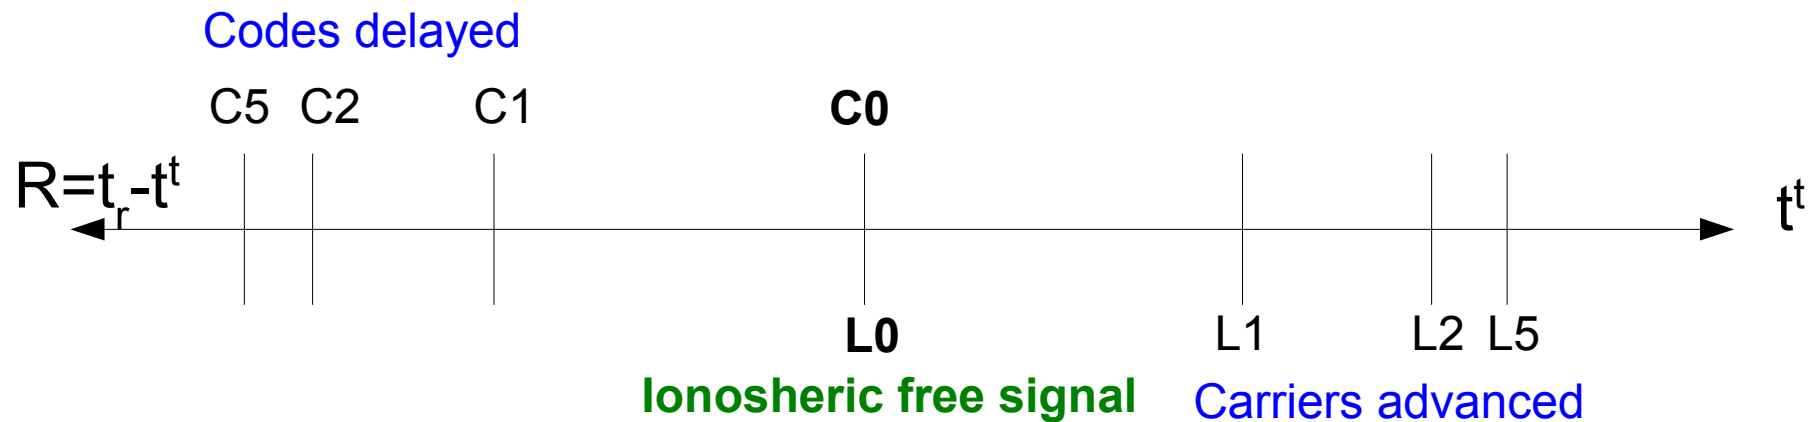


- C1, C2, C5 – Code Epochs on L1, L2, L5 Carrier
- L1, L2, L5 – Carrier Phase Epochs
- C0, L0 – Ionospheric free (First Order) Linear Combination for Code (C0) and Carrier (L0)
- RTK requires ambiguity free L0 or elimination of ionospheric effect

Narrow and Wide Lanes



Apparent Signal Transmission Times:

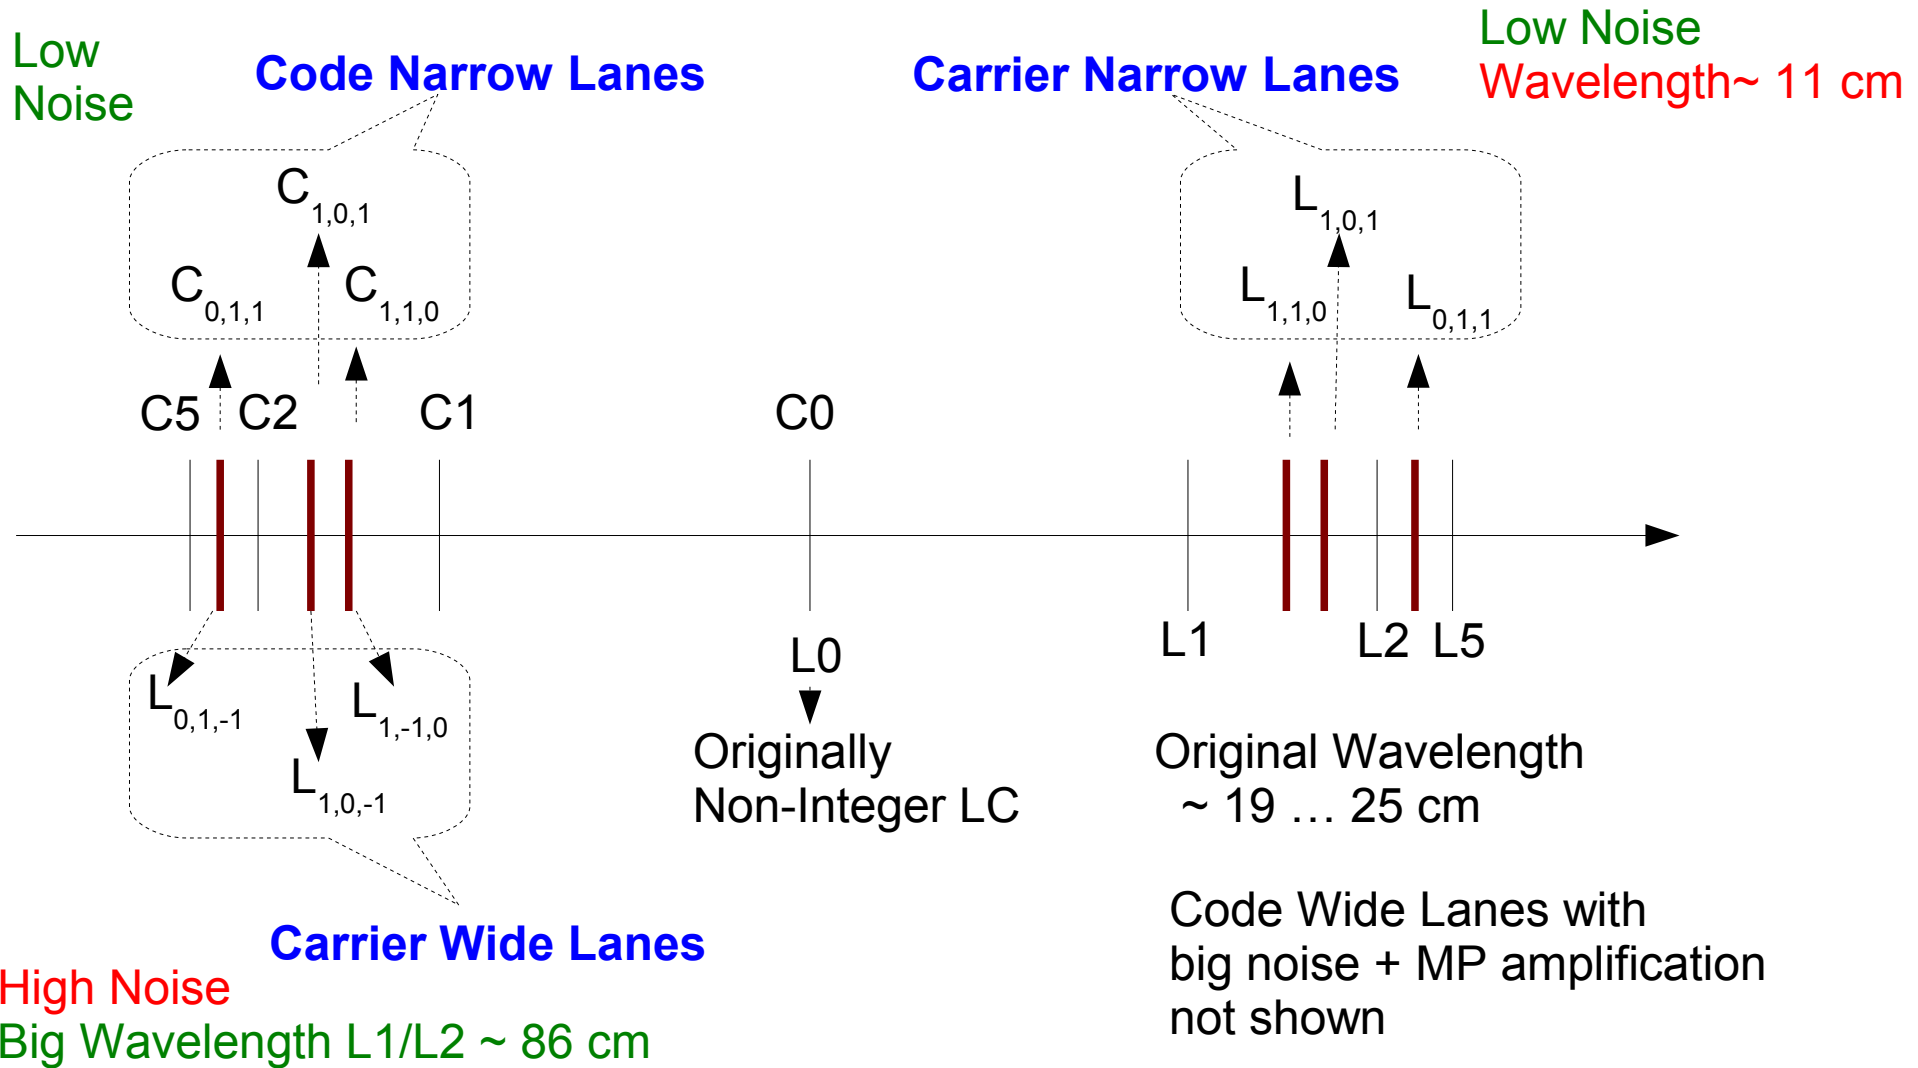

GFAR Principle: Step 1: Solve n-1 Wide Lanes




Melbourne-Wübbena MW-AR:

Difference of Code Narrow Lanes and Carrier Wide Lanes directly provides Wide Lane Ambiguity

Low Noise

Code Narrow Lanes

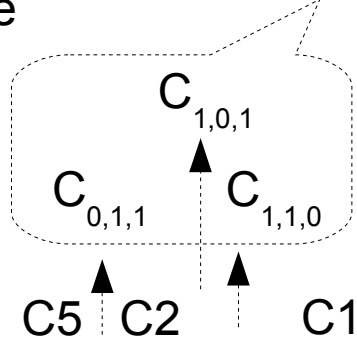

Limitation: Code Noise and Multipath (TTFA: Minutes)

Big WL

Carrier Wide Lanes

HW signal biases ==> Double Differences or Estimation

GFAR Principle: After Step 1: Even-Odd Condition




If $N_i - N_j$ is even
then $N_i + N_j$ is even

If $N_i - N_j$ is odd
then $N_i + N_j$ is odd

Effective Narrow Lane WL increases by Factor: 2

Low Noise
WL ~ 21 cm

Carrier Narrow Lanes

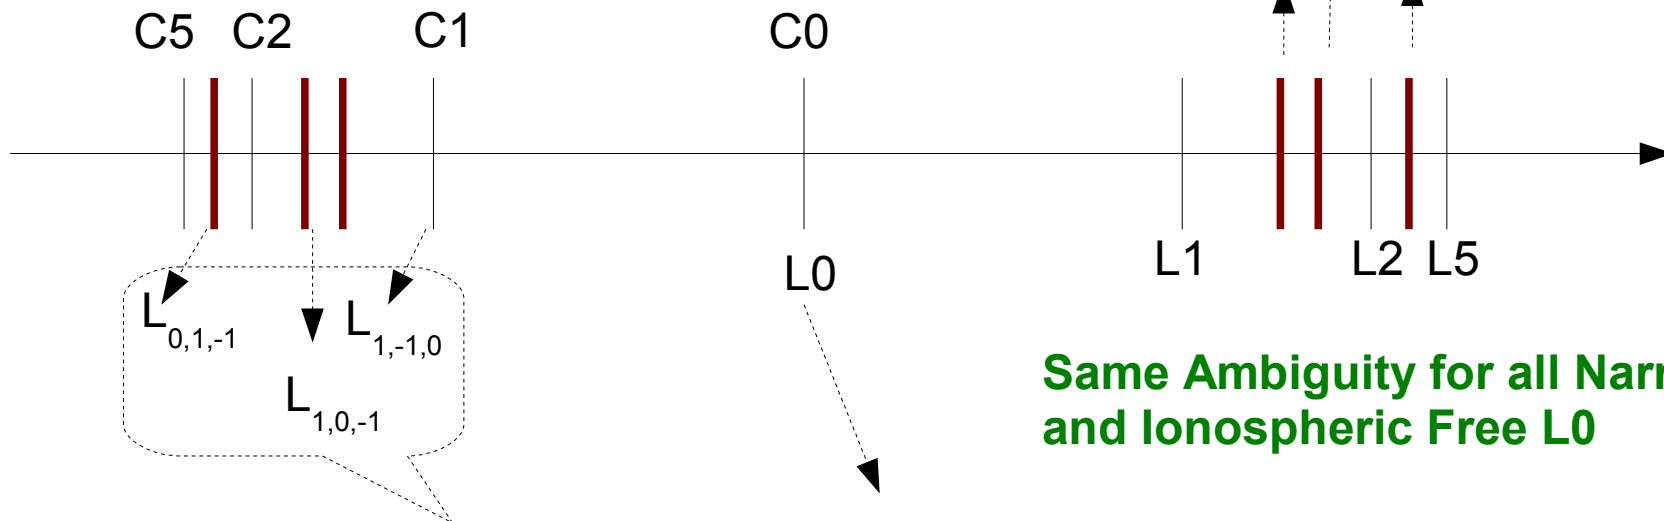

High
WL

**Carrier Wide Lanes
Ambiguities Resolved**

**Same Ambiguity for all Narrow Lanes
and Ionospheric Free L0**

**Integer LC WL ~ 11 cm!
Noise and MP of original signals
amplified by factor of ~3 in L0**

Ambiguity Resolution for L0




- With resolved Wide-Lane ambiguities the **ionospheric free signal (L0)** has **integer ambiguity with a wavelength of approx. 11 cm.**
- **L0 noise+MP ~ 3 * noise+MP in L1,L2,L5**
- AR for L0
 - Wavelength of ~11 cm and amplified noise and MP do not allow fast AR
 - **Long TTFA for reliable AR**
 - not within seconds or few minutes
 - **L0-AR may not be feasible at all for kinematic applications**
 - **==> No RTK performance!**
- Solution:
 - **Ionospheric constraints to increase the “effective wavelength”**
 - With no ionosphere the **effective wavelength** for AR increases to twice the wide lane wavelength (**172 cm for GPS L1/L2**) due to the even-odd condition between wide and narrow lane ambiguities
 - **==> key issue for RTK performance**




OSR and SSR


Observation Space Representation – Raw Observation

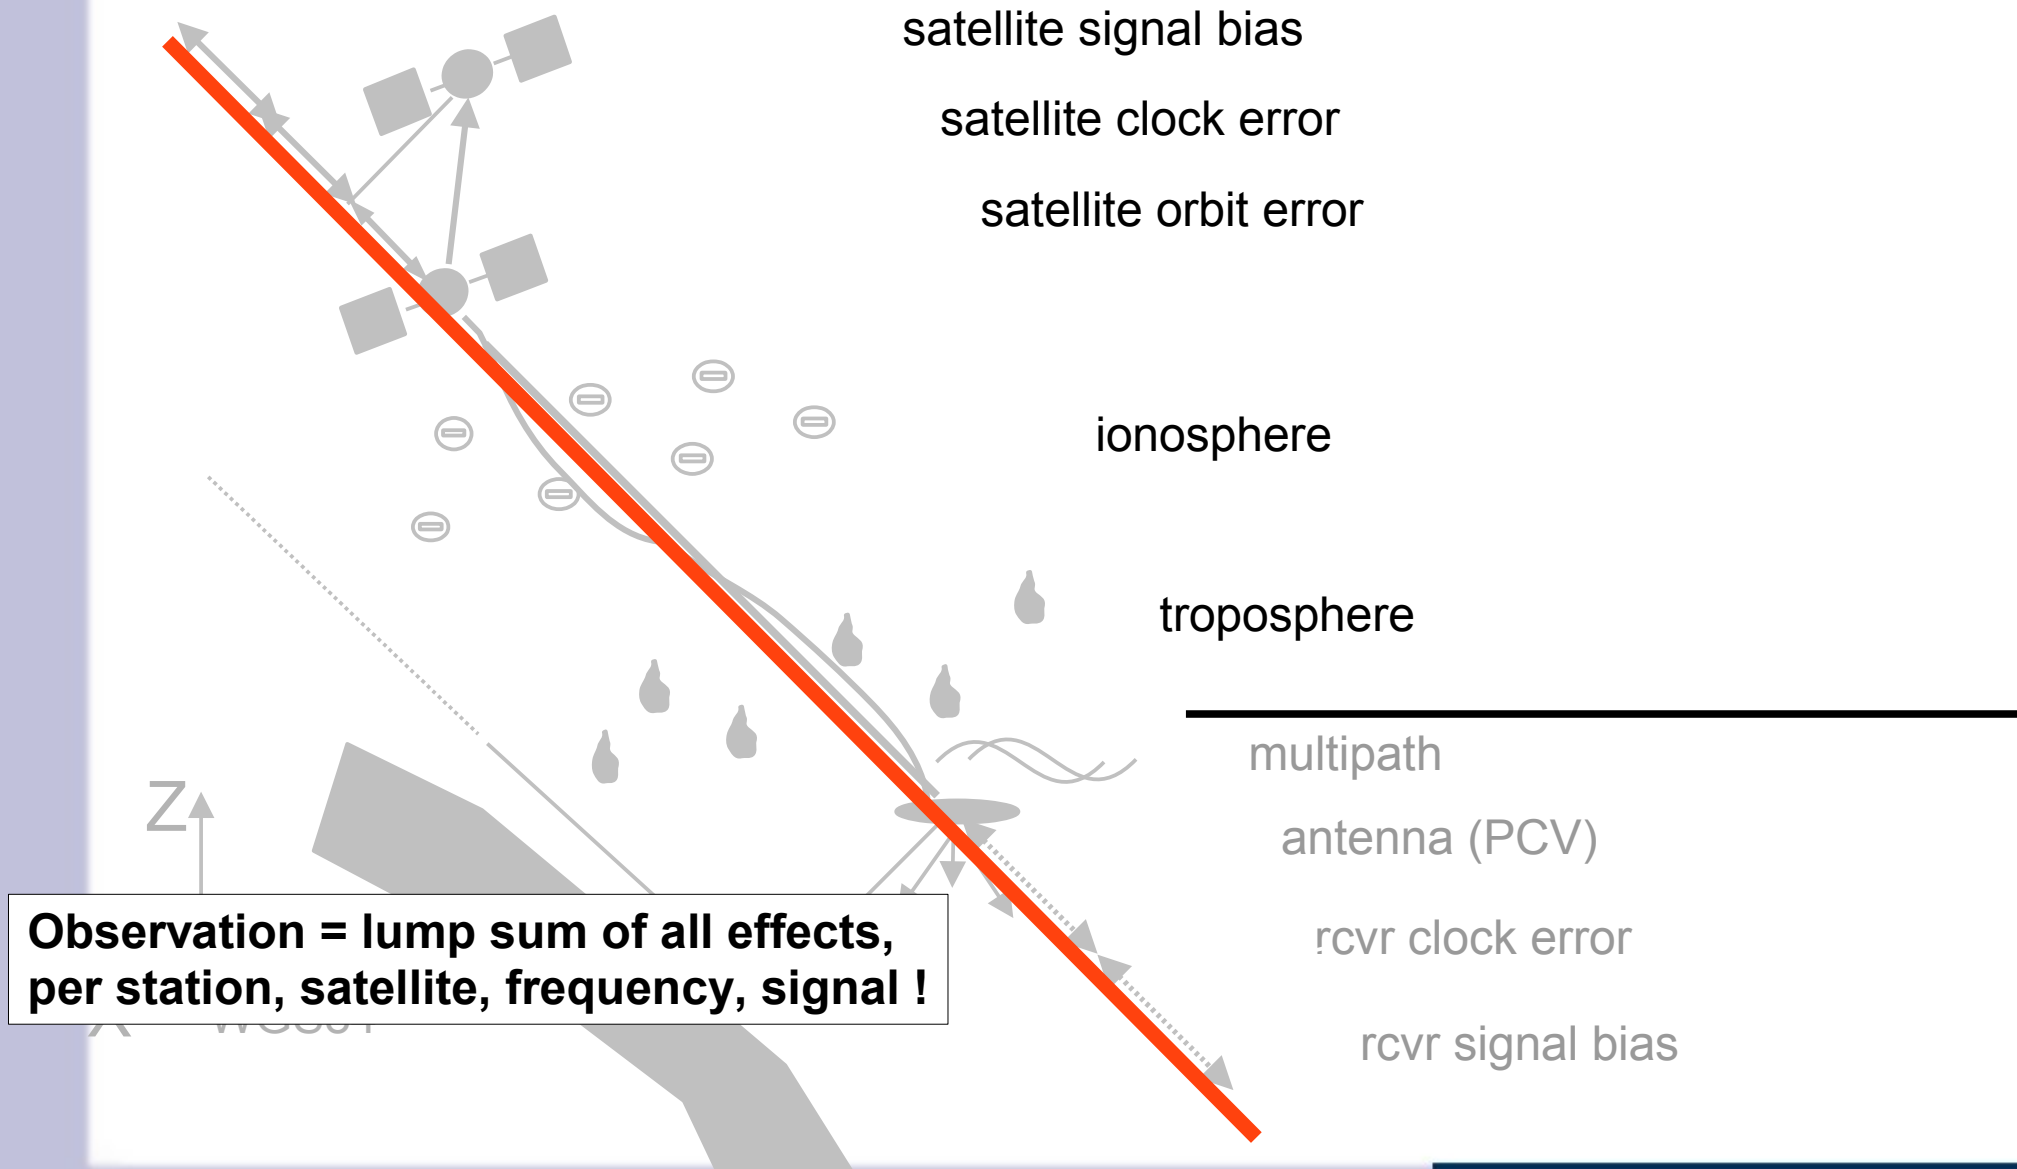


Observation Space Representation – Range Correction

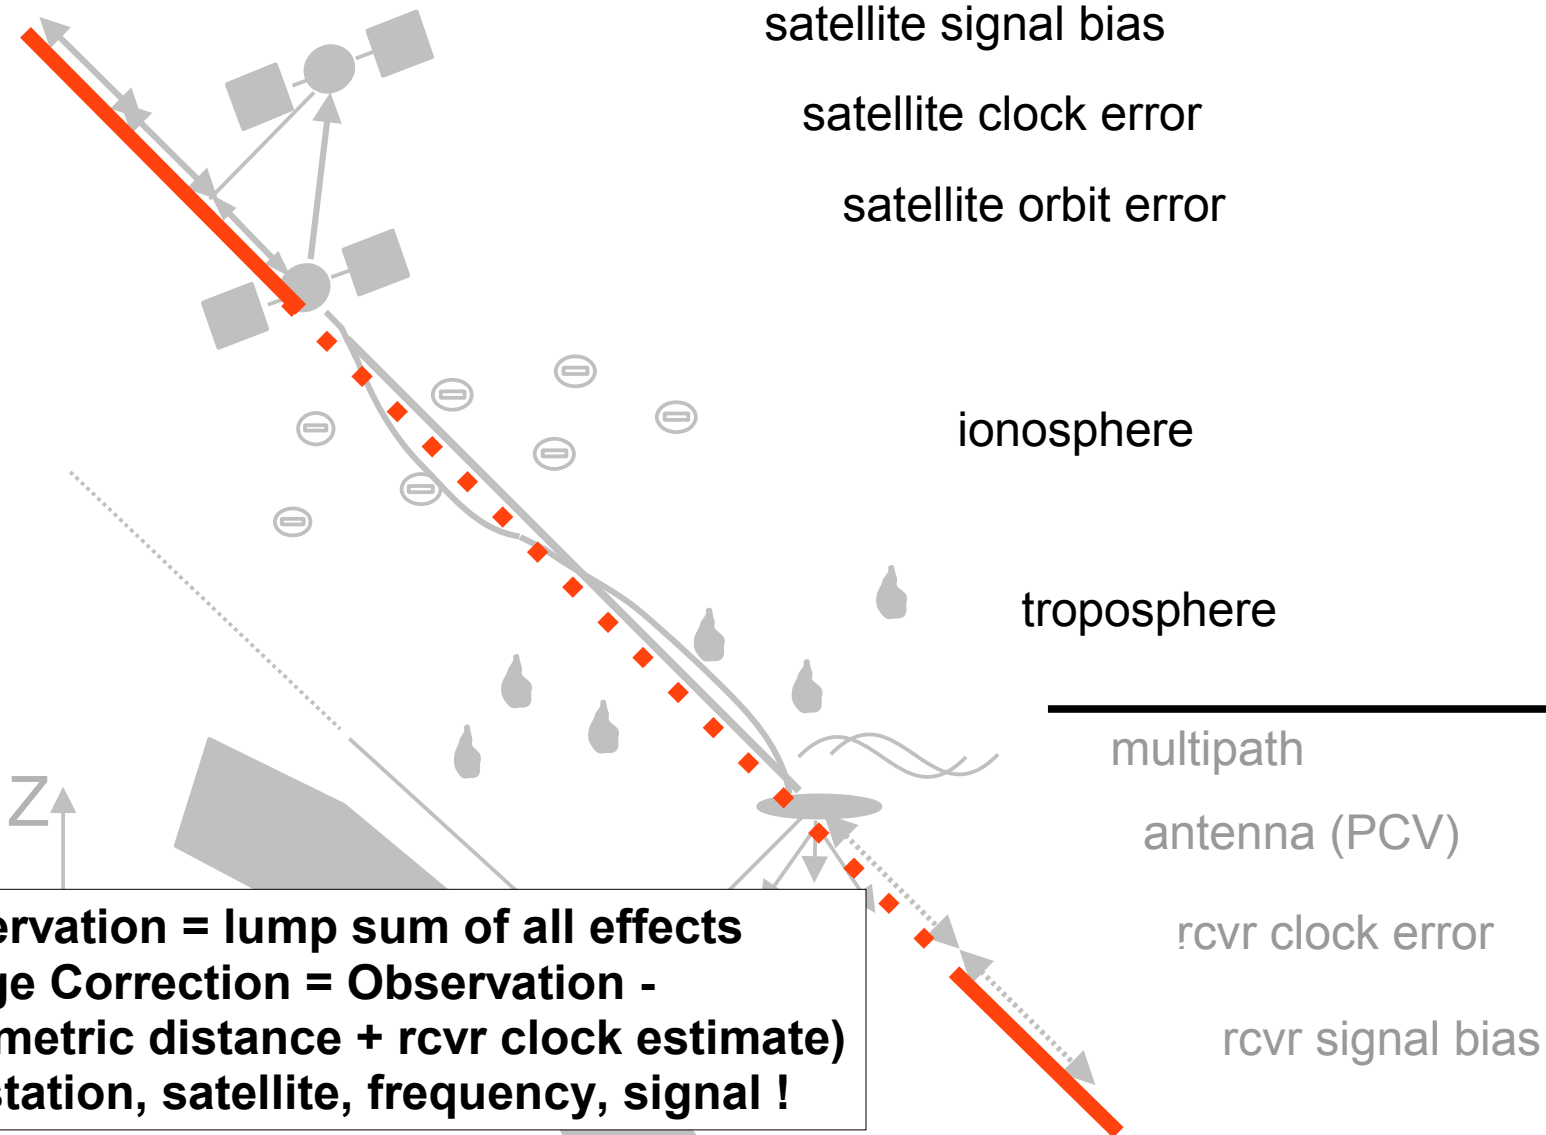


State Space Representation – Error States

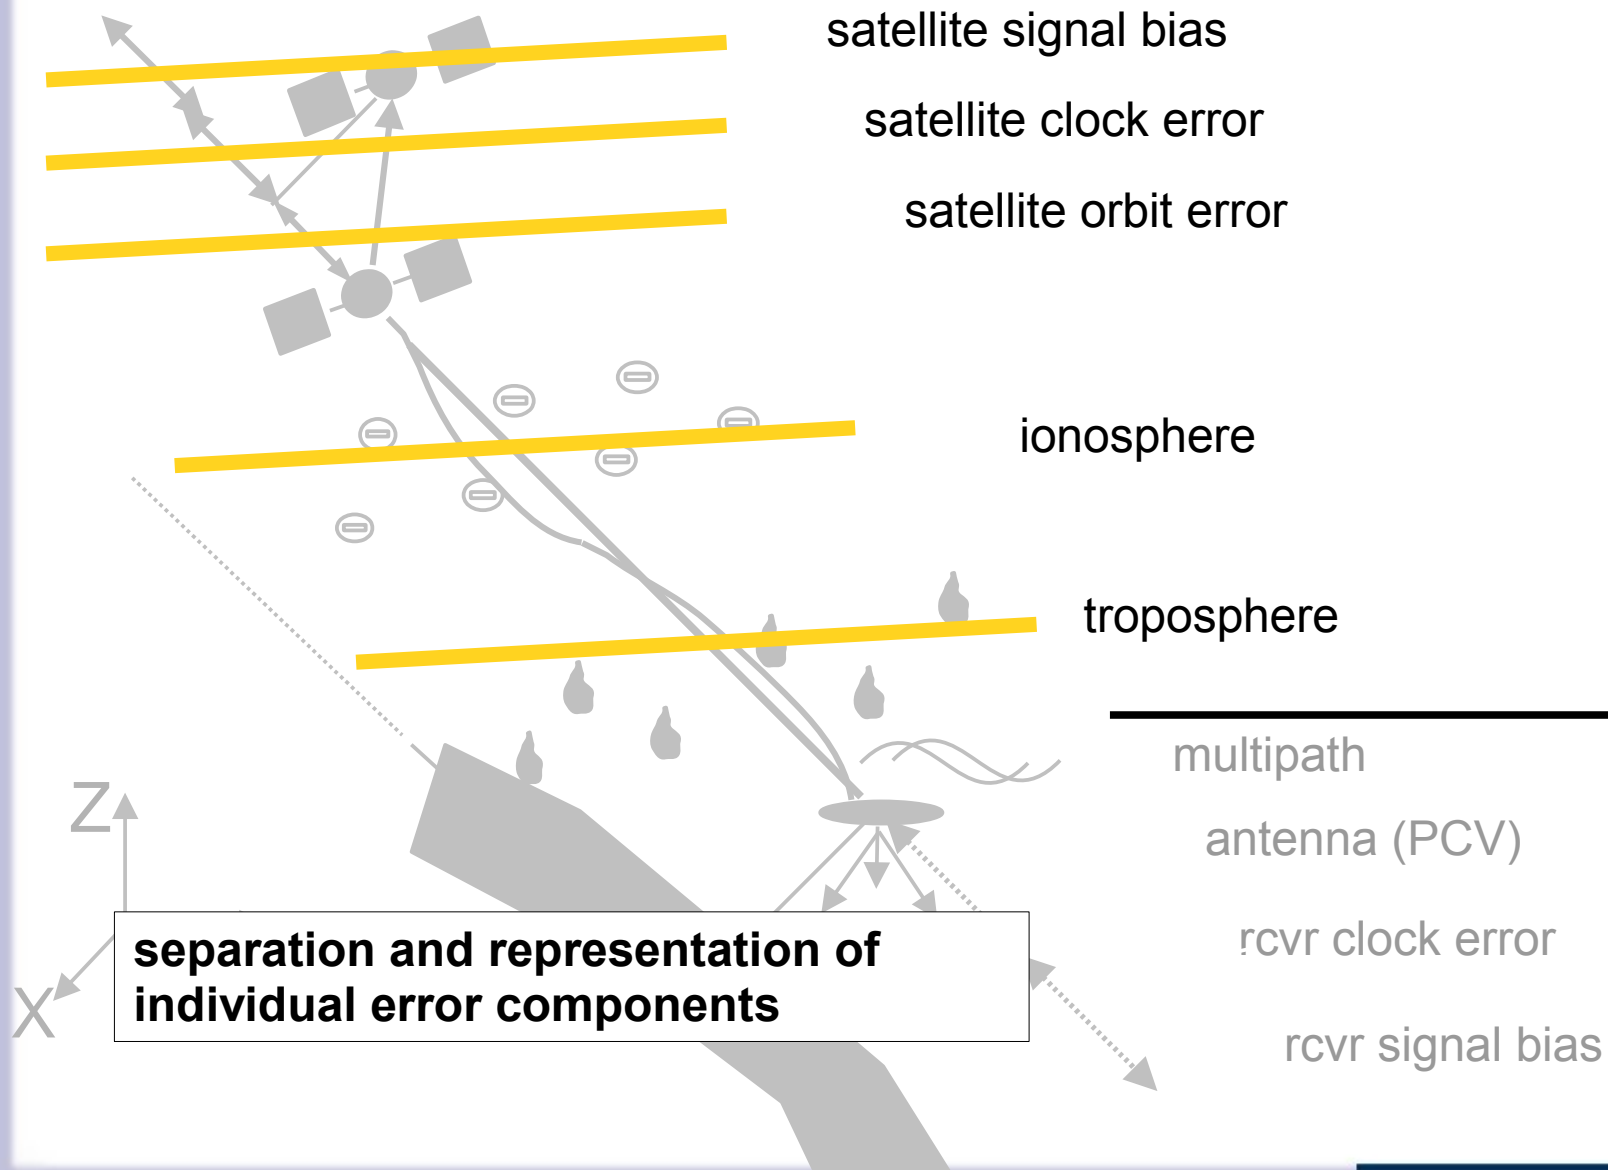

SSR – Common and Individual States

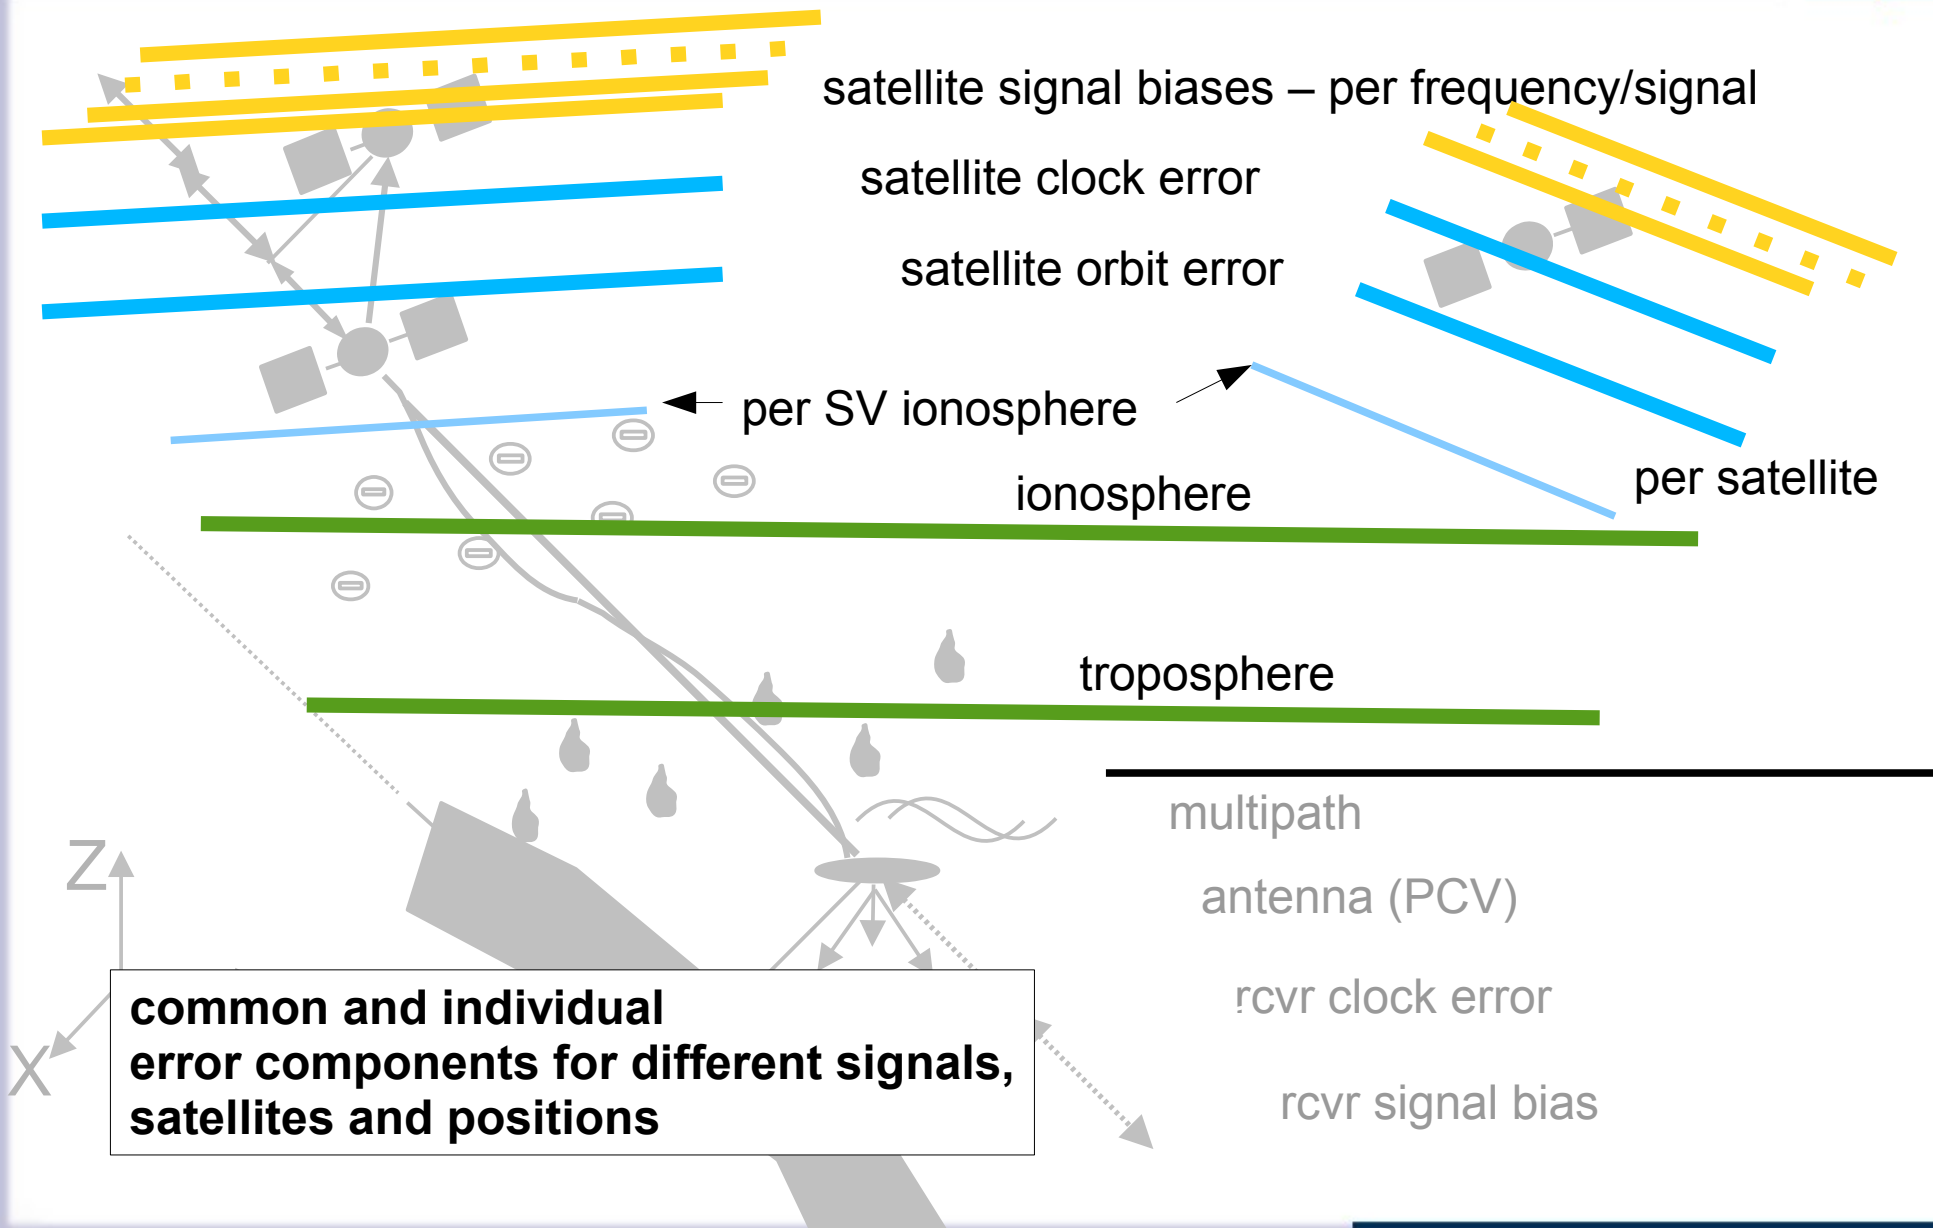

SSR – Spatial Variations of Atmospheric States

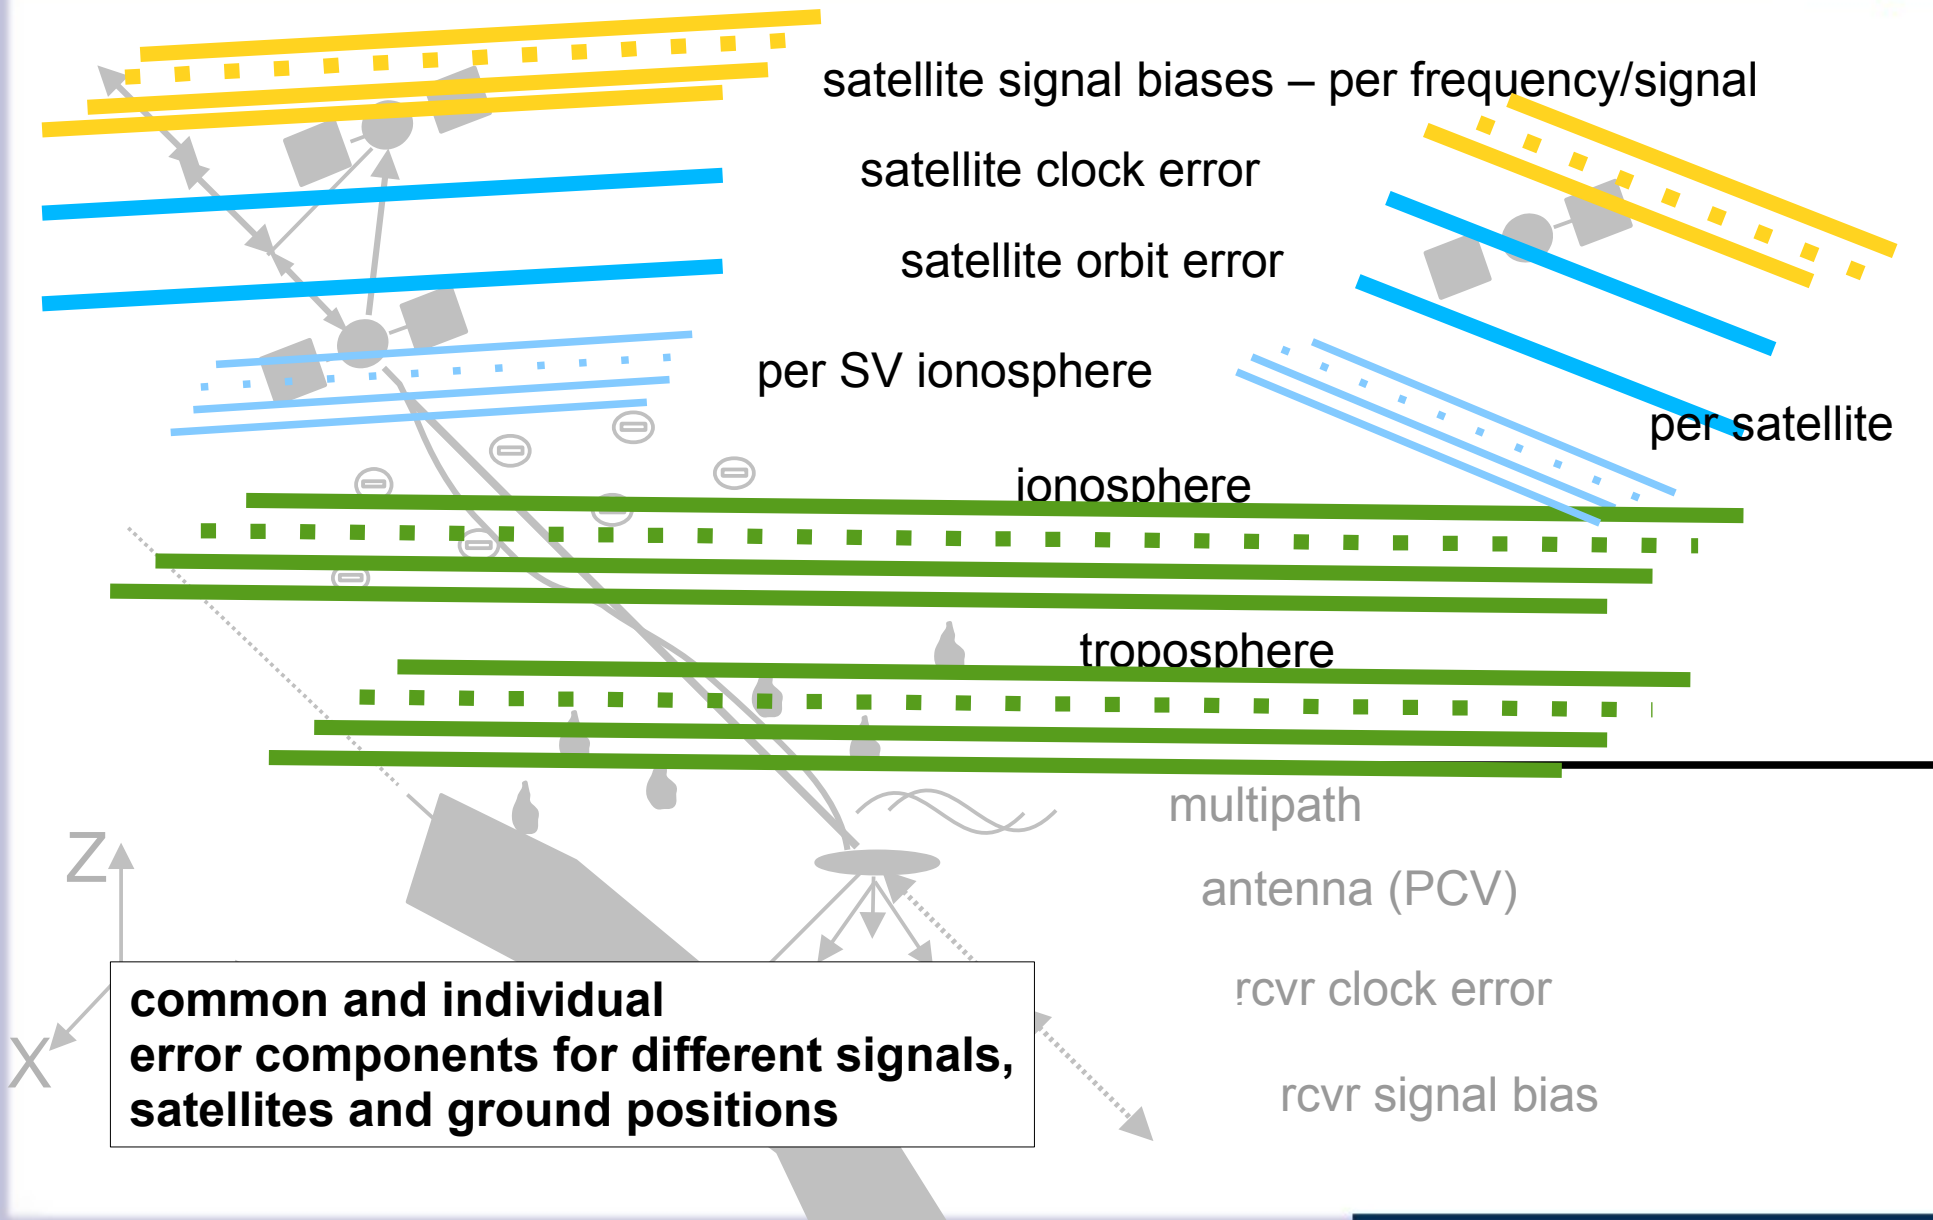




- › OSR in operation in many applications and services
- › **Network-RTK**
 - Well standardized methods
 - ♦ Non-physical reference station
 - PRS, VRS
 - ♦ MAC
 - Range correction differences
 - ♦ FKP
 - Range correction gradients
 - Network RTK services can fully or partly be derived from a State Space Model (SSM)
 - Problems
 - ♦ High ionospheric irregularities still cause ambiguity fixing problems for some rover types

VRS Virtual Reference Station
PRS Pseudo Reference Station
MAC Master Auxiliary Concept
FKP Flächenkorrekturparameter



- Different SSR services are in operation
 - **IGS Precise Point Positioning (PPP)** – Postprocessing
 - Main State Parameters (IGS products): Orbits, Clocks, (VTEC)
 - SBAS systems
 - State Parameters; Orbits, Clocks, VTEC
 - Proprietary systems with satellite communication
 - Network-RTK services derived from SSM and converted to OSR
- Major Issue: **Standardization for RT applications**

Application to Rover System

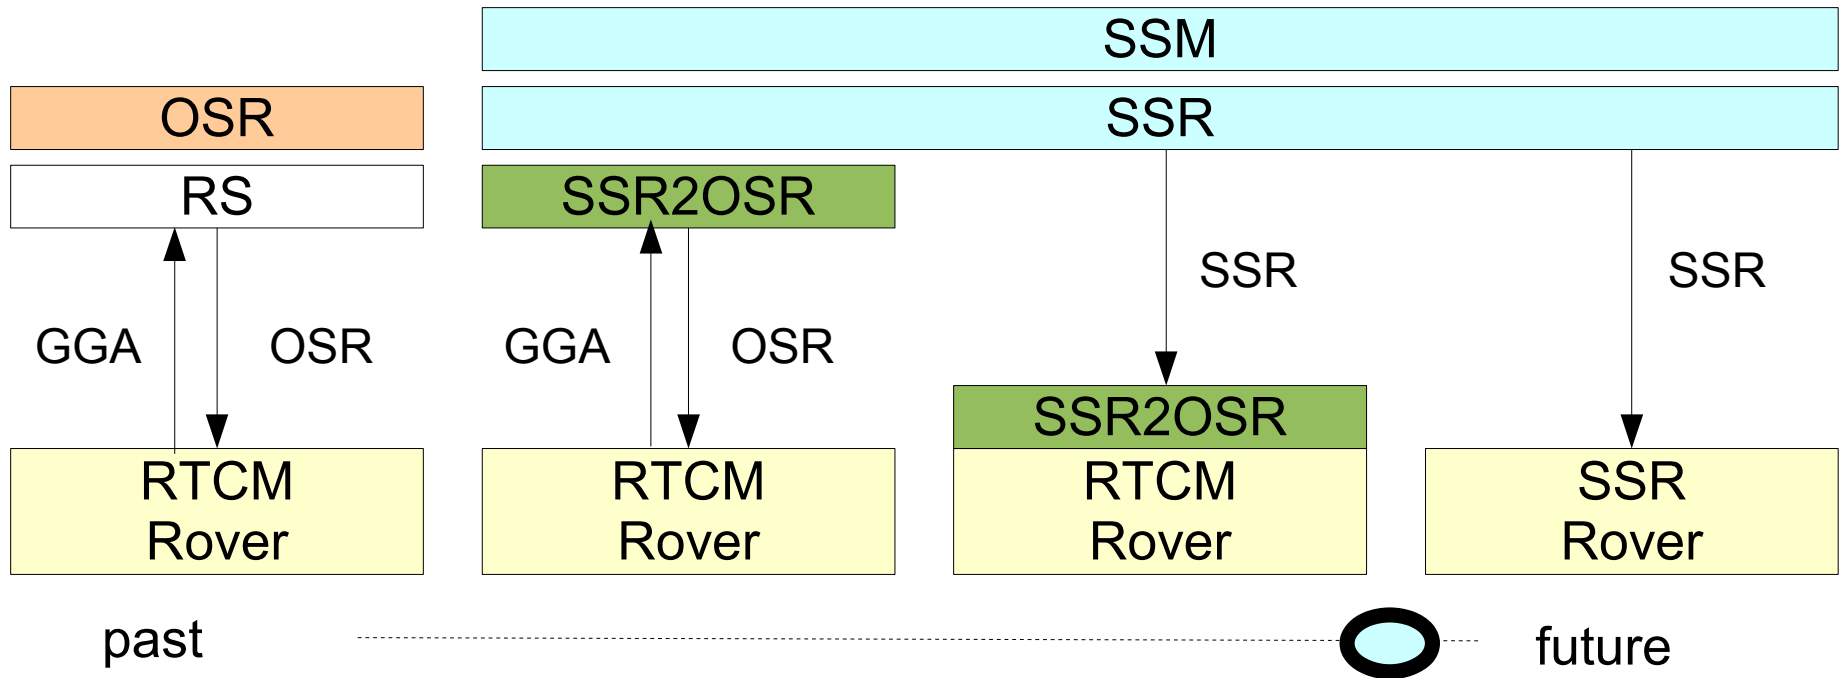

GGA – NMEA Position Message

- SSM State Space Monitoring
- SSM/SSR concept operationally applied with Geo++ GNSMART



RTCM-SSR Development Requirements, Strategy and Rules

General Requirements / Rules for RTCM-SSR Development



- RTCM-SSR shall be a **self-contained** format as far as possible.

I.e. all necessary information for consistent processing of an RTCM-SSR stream shall be contained in the stream or shall be specified as part of the standard document. The need for external information should be avoided.
 - TBC: SV-PCV
- The definition of RTCM-SSR contents **shall not limit/restrict** the generation of SSR streams **to certain generation models or approaches**.

Example: Conventional approaches with dynamic orbit modeling (IGS) as well as approaches with kinematic orbit modeling shall be supported.

- International **conventions for observation modeling and/or corrections** shall be applied **as far as necessary** and as long as they are well defined and documented and freely usable.

Do not prevent new ideas, models or approaches.

General Requirements / Rules



- The standard shall allow **different update rates for different state parameters** in a flexible way.

Different error states possess different variability with time. Slowly changing states need lower update rates as highly variable states. This is the key characteristic that allows minimization of stream bandwidth.

- **Self-consistency** of RTSM-SSR streams must be achieved.
- **Consistent processing** of SSR stream contents must be ensured.

Consistency is one of the major requirements in order to achieve the desired performance. Consistency of algorithms and computations for reference models must be assured as well as consistency of state parameter sets.

- The RTCM-SSR standard shall support **scalable global, continental, regional and/or local applications**.



Standardization Issues Consistency

Standardization Issues and Conventions



- Requirement: **Consistent Modeling and Processing**
 - **Reference Frame(s)** (Global, Regional,..)
 - Transformation into destination CRS
 - **Site Displacements**
 - Solid Earth Tides
 - Pole Tides
 - Ocean Loading
 - Atmospheric Loading
 - ...
 - **IERS conventions**

Standardization Issues and Conventions



- Requirement: Consistent Modeling and Processing
 - Corrections and Reference Models
 - Reference orbit and clock computation (GNSS-ICDs)
 - Relativistic Effects (GNSS-ICDs, IERS conventions),
 - Phase Wind-Up (SV attitude),
 - Higher order ionosphere
 - Troposphere reference model
 - SV antenna PCO and PCV corrections
 - Signal dependent biases (phase shifts)
 - ...

Consistency



- **Parameter Consistency**
 - “**static**” parameters to be specified in the standard document
 - “**non-static**” parameters preferably to be included in the SSR stream (self-contained), alternatively to be referenced to external, freely accessible documents
- **SSR Data Set Consistency**
 - **Self-Consistency** of SSR parameters with different update rates must be ensured

Parameter Correlation and Self-Consistency



- Different state parameters are correlated.
- Example 1:
 - **Satellite Clock and Satellite Signal Biases**
 - Very high correlation / linear dependency
 - A different set of signal biases leads to different estimates for the satellite clock. Due to the linear dependency (**correlation=1**) between such parameters both estimates are equally valid.
 - A rover must use consistent set of state parameters. A mixing of parameters from non-consistent sources is not allowed.
 - RTCM-SSR shall be self-contained ==> clocks and biases are to be included into the streams.

Parameter Correlation and Self-Consistency



- Different state parameters are correlated.
- Example 2:
 - **Satellite Orbit and Satellite Clocks**
 - The effect of a radial satellite orbit error in the range and phase measurements can be calculated by
 - $d_{obs} = \cos(\text{nadir_distance}) * d_{radial}$
 - In the vicinity of the earth the maximal nadir distance (satellite at 0° elevation) is about 14°, so $\cos(14^\circ) \sim 0.97$. i.e. the influence of the radial orbit error is in the range of 0.97...1.
 - A 10 cm radial orbits error, compensated by a 10 cm clock error results in a maximum observation error of 3 mm at 0° elevation.
 -
- ==> State Parameters must be self-consistent.
- ==> Do not mix state parameters from different sources.



OSR vs SSR

OSR vs SSR



- **Future variety of GNSS signals**
 - OSR services must observe the different signals
 - Alternative: Mixture of OSR with satellite inter-signal biases taken from SSR
 - SSR services must determine/use inter-signal biases
- **Spatial area of validity**
 - OSR – limited area of validity
 - SSR – area of validity according to type of state parameter
 - Global: satellite state parameters (orbits, clocks, signal biases,...)
 - Global: coarse vertical ionosphere
 - Regional: dense vertical ionosphere, coarse troposphere
 - Local: precise slant ionosphere, dense troposphere
- **Temporal validity**
 - OSR – corresponding to validity of state parameter with highest variability
 - SSR – validity according to characteristics of parameters (low rate, medium rate, high rate parameters)

OSR vs SSR



- Performance Issues
 - OSR: performance is affected by local reference station antenna, near- and far-field multipath, signal diffraction and signal obstruction effects
 - SSR: local reference station effects are greatly reduced or eliminated
- “Scalability” of Services
 - OSR: limited scalability
 - omit observations
 - SSR: good scalability
 - Covered area
 - Performance (Accuracy, Initialization Time)
 - Positioning Mode
 - SF / DF / TF
 - PPP, PPP-RTK

OSR vs SSR



- **Communication Issues**
 - **Bandwidth**
 - OSR: high update rate for all observables (typically 1 Hz) ==> high bandwidth requirement
 - SSR: high update rates only for highly variable parameters (SV clocks, Slant Ionosphere) ==> low bandwidth requirement
 - **Simplex or Duplex** communication channels
 - **OSR: Duplex** communication is required
 - VRS computation, selection of nearest reference station
 - **SSR: Simplex/Broadcast** communication generally sufficient
 - Possibility of highly compressed streams for large areas
 - Variety of media

OSR vs SSR



- Coordinate Reference Frame issues
 - OSR: global/continental/regional/local reference frames
 - Represented through reference station coordinates
 - Site displacements often neglected due to high correlation between RS and rover
 - SSR: global/continental reference frames
 - Represented through satellite orbit
 - Regional and local frames through transformation
 - Site displacements must be corrected

OSR vs SSR



- **Service generation and infrastructure issues**
 - OSR: Network-RTK services require homogeneous high quality RS equipment
 - SSR:
 - different state parameters may be derived from different sets of RS with different equipment
 - State parameters from different providers may be mixed as long as consistency is maintained
 - Example: Use IGS-IGU precise predicted orbits and determine satellite clock corrections
- **Standardization issues**
 - OSR: low standardization efforts
 - SSR: high standardization efforts

Summary



- SSR can replace OSR techniques for all types of GNSS positioning applications with better performance and less costs
- SSR standardization is challenging
- Status of RTCM-SSR and future steps: Next presentation



Thank you for your attention!